


Zero Power Consumption Sensor WG414HT

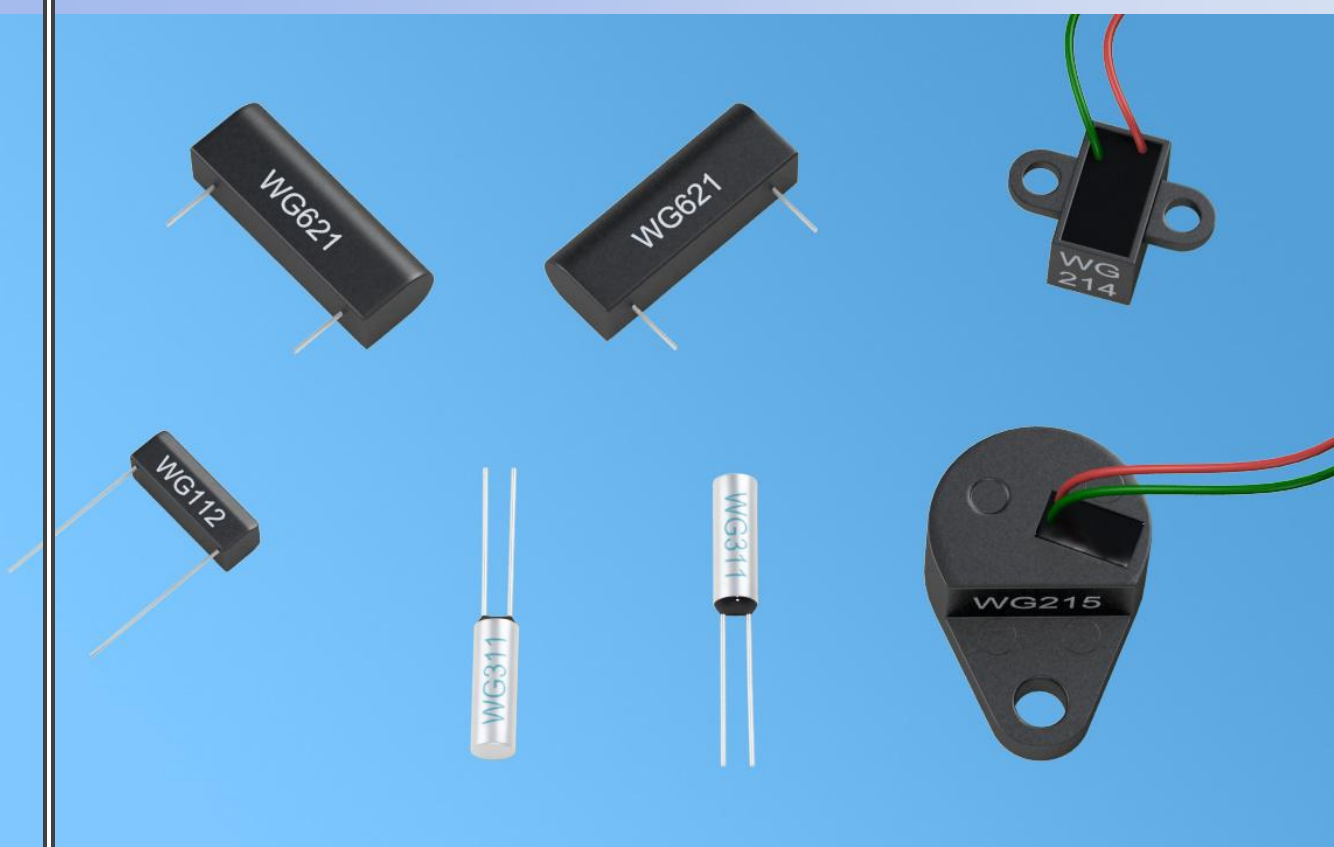

Atiny
Nanjing AH

A magneto-electric micro-energy harvesting sensor
without external power supply

◆ Features

► Operating without external power supply.

► Bipolar excitation operation mode

The sensor outputs a pair of positive and negative electric pulse signals when the polarity of the external triggered magnetic field changes for a circle.

► Non-Contact Electromagnetic Acquisition

It is an intrinsically safe device without mechanical contact or electric sparks between the magnetic field induction device and the triggered magnetic field.

► Constant pulse energy

The value of the pulse energy output from the sensor is independent of the frequency of magnetic field variations and remains constant even the frequency of magnetic field variations are at very low level. At high frequency of magnetic field variations, higher energy values are generated due to additional inductive effects.


► Stable working performance

Only when the external magnetic field polarity changes, and magnetic induction intensity reaches the excitation threshold, the sensor will outputs a pulse signal, so the vibration won't happen. Pulse output energy still stays constant even after million times of polarity transitions.

► LANmanagement

The output signal can be remotely transmitted by the signal lines, so it's suitable for LANmanagement.



► Wide operating temperature range(High temperature is up to 200), strong environmental adaptability.

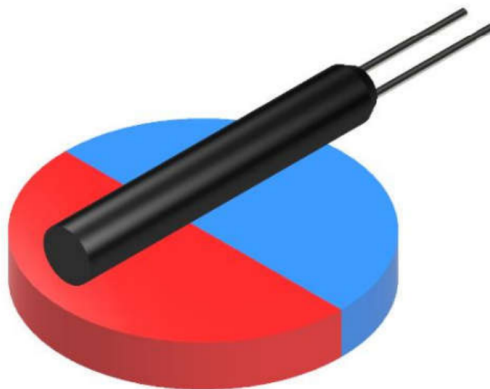

◆ Principle description

Zero-power consumption sensor is developed based on Wiegand effect theory, that is, after appropriate treatment, the metallurgical phase of the alloy wire will change, its outer shell coercivity is much larger than the inner shell coercivity, relying on this magnetism difference and a certain condition of external applied magnetic field, it can make the magnetization directions of inner core and the outer shell the same or opposite, and a determined external magnetic field can repeat the change of magnetism, this phenomenon is known as the Wiegand effect. Sensors developed based on this effect are generally known as Wiegand sensors, that is zero-power magnetic sensors.


Manufactured on the basis of the Wiegand effect, it can actively generate energy, and it can generate sharp voltage pulse signal without the external power supply, that is, when the polarity of the external magnetic field alternately changes once, it will output a positive or negative pulse. The pulses generated can not only be used as a self-powered pulse signal generator, but also provide energy for ultra-low power devices. It makes zero-power magnetic sensors own unique advantage in low-power and energy-saving applications.

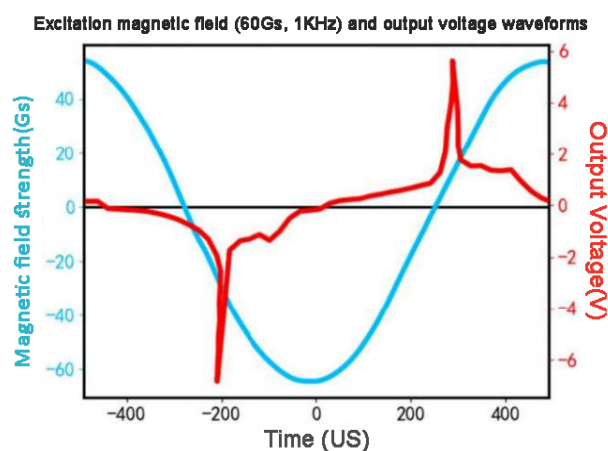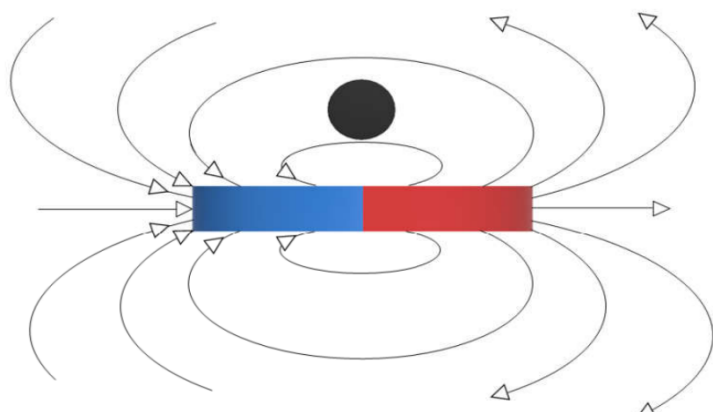

A magneto-electric micro-energy harvesting sensor
without external power supply

◆ Application

Power-type zero power consumption magnetic sensor as a passive signal generator can be used for intelligent water meter, flow measurement of heat meter, speed calculation of high-speed trains and electric cars, oil level measurement, position detection of tilting rain gauge, etc.

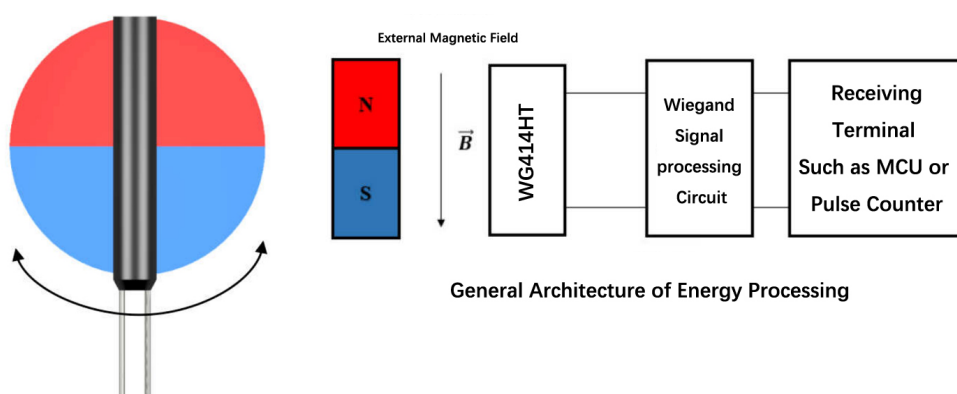

◆ Pin Description




Note: OUT1, OUT2 are output pins.

◆ Parameter

Parameter	Symbol	Min.	Typ.	Max.	Unit
Excitation magnetic field	B	3	6	12	mT
Pulse signal amplitude	V_O	1.5	—	—	V
Pulse width	τ	10	—	30	us
DC Internal resistance	R	400	—	420	Ω
Operating frequency	f	—	—	10	kHz
Operating temperature	T	-40	—	200	°C

A magneto-electric micro-energy harvesting sensor
without external power supply

◆ Packaging Size for Reference

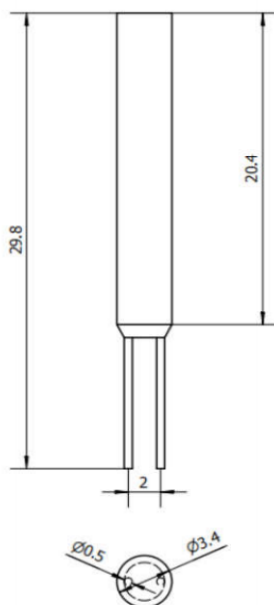

Unit: mm
Tolerance: $\pm 0.2\text{mm}$

◆ Customization Service

This product can be customized with various packages, temperature performance and some related characteristics. Reach out to us for more information.

